

Right hand (R) shown.

Designation	H	B	LF	LH	HF	WF	HBH	Insert
STCR/L1010X18	10	10	120	18.5	10	10	4.5	TC*18...
STCR/L1212F18	12	12	85	18.5	12	12	2.5	TC*18...
STCR/L1212X18	12	12	120	18.5	12	12	2.5	TC*18...
STCR/L1616X18	16	16	120	18.5	16	16	-	TC*18...
STCR/L2020H18	20	20	100	18.5	20	20	-	TC*18...
STCR/L2020X18	20	20	120	23	20	25	-	TC*18...
STCR/L2525Z18	25	25	135	23	25	30	-	TC*18...

Note: Use right-hand toolholders (R) with right-hand inserts (R); and left-hand toolholders (L) with left-hand inserts (L).


SPARE PARTS

Designation	Clamping screw	Wrench
STCR...	CSTC-4L100DL	T-1008/5
STCL...	CSTC-4L100DR	T-1008/5

TETRAMCUT

TetraMini-Cut STCR/L-18

External grooving and threading toolholder, with high pressure coolant capability

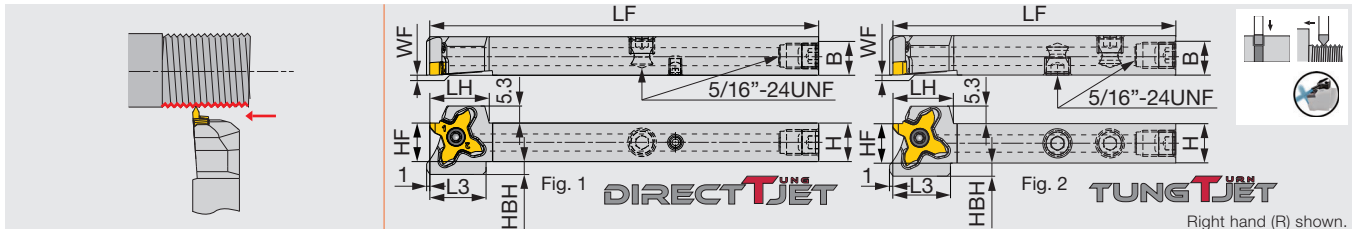

Right hand (R) shown.

Designation	H	B	LF	LH	L3	HF	WF	HBH	Fig.	Insert	Torque*
STCR/L1212F18-CHP	12	12	85	18.5	17.5	12	0/12	4	2	TC*18...	1.2
STCR/L1212X18-CHP	12	12	120	18.5	17.5	12	0/12	4	1	TC*18...	1.2
STCR/L1616X18-CHP	16	16	120	18.5	-	16	0/16	0	1	TC*18...	1.2

This toolholder can be used with threading and grooving inserts.

Note: Use right-hand toolholders (R) with right-hand inserts (R); and left-hand toolholders (L) with left-hand inserts (L).

SPARE PARTS

Designation	Clamping screw	Wrench
STCL**18-CHP	CSTC-4L100DR	T-1008/5
STCR**18-CHP	CSTC-4L100DL	T-1008/5

Groove width : 0.33 ~ 3.0 mm
Pitch : 0.8 ~ 3.0 mm