



Designation	APMX	DC	ZEFP	CICT	DCSFMS	DCONMS	CBDP	LF	b	KWW	WT(kg)	Air hole	Insert
TLA15R080L070M31.7-04M	70	80	4	20	78	31.75	32	100	8	12.7	2.29	With	TOMT15...
TLA15R080L070M32.0E04M	70	80	4	20	78	32	25	100	8	14.4	2.38	With	TOMT15...
TLA15R100L083M38.1-05M	83	100	5	30	98	38.1	38	110	10	15.9	4.24	With	TOMT15...
TLA15R100L083M40.0E05M	83	100	5	30	98	40	32	110	9	16.4	4.26	With	TOMT15...

Note: Coolant needs to be supplied from the end of the arbor inlay. Coolant cannot be supplied from the set bolt.

SPARE PARTS

Designation	Clamping screw	Grip	Torx bit	Lubricant	Shell locking bolt
TLA15R080...	TS45120I	H-TB2W	BT20S	M-1000	CM16X75
TLA15R100...	TS45120I	H-TB2W	BT20S	M-1000	CM20X80

*Recommended clamping torque (N·m): TS45120I=5

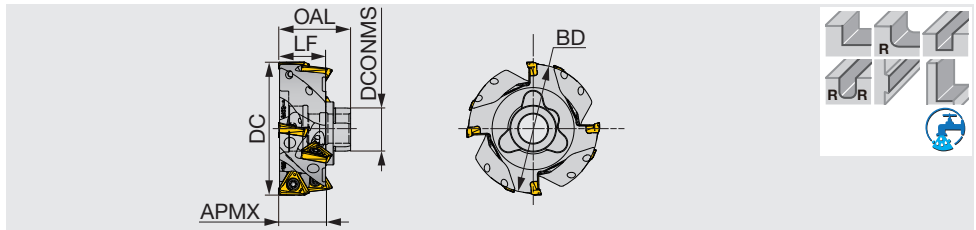

Designation	APMX	DC	ZEFP	CICT	BD	DCONMS	OAL	LF	WT(kg)	Air hole	Insert
TLA15R080L028-04S	28	80	4	8	77.6	27	43	28.2	0.65	With	TOMT15...
TLA15R100L028-05S	28	100	5	10	97.2	33	46	28	1.05	With	TOMT15...

Note: Coolant needs to be supplied from the end of the arbor inlay. Coolant cannot be supplied from the set bolt.

SPARE PARTS

Designation	Clamping screw	Grip	Lubricant	Torx bit
TLA15...	TS45120I	H-TB2W	M-1000	BT20S

*Recommended clamping torque (N·m): TS45120I=5

CENTER BOLT

No. of subunits	1 pc	2 pcs
TLA15R080L028-04S	CM16x120	CM16x140
TLA15R100L028-05S	CM20x120	CM20x150

