


- High Feed Milling
- Face Milling
- Shoulder Milling
- Slot Milling
- Profile Milling
- Approach angle
- 10°-20°
- 45°
- 70°
- 85°
- 88°
- 90°
- Others

# TUNGSMILL

## TPYD06

Face mill for aluminium machining, for PCD inserts

GAMP = +9°, GAMF = +4°

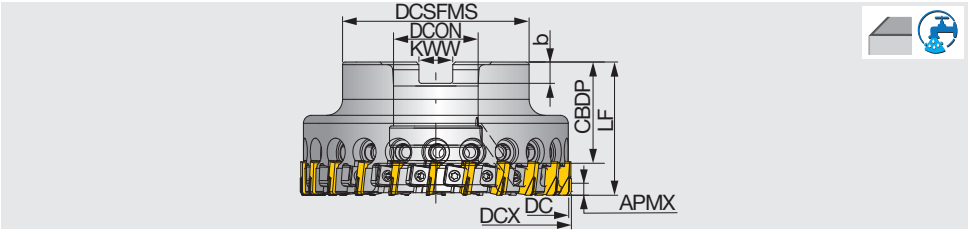

Designation	APMX	DC	DCX	CICT	DCSFMS	LF	DCON	CBDP	KWW	b	WT(kg)	Air hole	RPMX	Insert
TPYD06M063B22.0R10	4.5	63	65	10	45	40	22	20	10.4	6.3	0.57	With	19,000	YDEN0603...
TPYD06M080B27.0R16	4.5	80	82	16	60	50	27	22	12.4	7	1.24	With	17,000	YDEN0603...
TPYD06J080B25.4R16	4.5	80	82	16	60	50	25.4	26	9.5	6	1.26	With	15,000	YDEN0603...
TPYD06M100B32.0R22	4.5	100	102	22	70	50	32	25	14.4	8	1.78	With	14,000	YDEN0603...
TPYD06J100B31.7R22	4.5	100	102	22	70	50	31.7	32	12.7	8	1.76	With	12,000	YDEN0603...
TPYD06M125B40.0R26	4.5	125	127	26	90	60	40	32	16.4	9	3.48	With	17,000	YDEN0603...
TPYD06J125B38.1R26	4.5	125	127	26	90	60	38.1	38	15.9	10	3.56	With	15,000	YDEN0603...
TPYD06M160B40.0R34	4.5	160	162	34	90	60	40	32	16.4	9	5.2	With	14,000	YDEN0603...
TPYD06J160B38.1R34	4.5	160	162	34	90	60	38.1	38	15.9	10	5.29	With	12,000	YDEN0603...

### SPARE PARTS


Designation	Clamping screw	Wedge fixing screw	Adjusting cam	Torx bit	Cam tightening screw	Wrench	Grip	Shell locking bolt
TPYD06M063B22.0R10	WF875N	DS-5T	AJC08	BLDT10/S7-A	SSHM4-4	P-2	H-TB2W	CM10X30H
TPYD06*080B2*.R16	WF875N	DS-5T	AJC08	BLDT10/S7-A	SSHM4-4	P-2	H-TB2W	CM12X30H
TPYD06*100B32.0R22	WF875N	DS-5T	AJC08	BLDT10/S7-A	SSHM4-4	P-2	H-TB2W	CM16X40H
TPYD06*100B31.7R22	WF875N	DS-5T	AJC08	BLDT10/S7-A	SSHM4-4	P-2	H-TB2W	TMBA-M16H
TPYD06*125B*.R26	WF875N	DS-5T	AJC08	BLDT10/S7-A	SSHM4-4	P-2	H-TB2W	TMBA-M20H
TPYD06*160B*.R34	WF875N	DS-5T	AJC08	BLDT10/S7-A	SSHM4-4	P-2	H-TB2W	TMBA-M20H

# TUNGSMILL

## EPYD06

Face endmill for aluminium machining, shank type, for PCD inserts

GAMP = +9°, GAMF = +4°

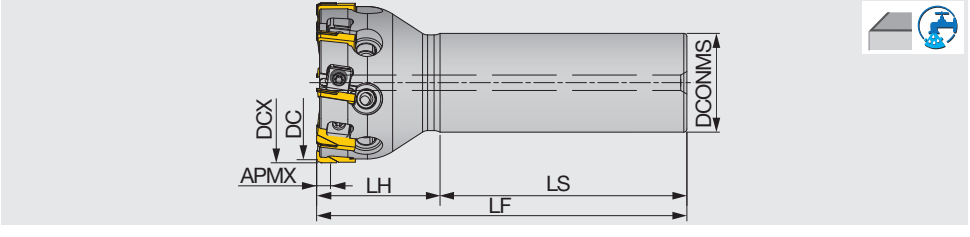

Designation	APMX	DC	DCX	CICT	DCONMS	LF	LH	LS	WT(kg)	Air hole	RPMX	Insert
EPYD06M050C32.0R08	4.5	50	52	8	32	120	40	80	0.57	With	22,000	YDEN0603...

### SPARE PARTS

Designation	Clamping screw	Wedge fixing screw	Adjusting cam	Torx bit	Cam tightening screw	Wrench	Grip
EPYD06M050C32.0R08	WF875N	DS-5T	AJC08	BLDT10/S7-A	SSHM4-4	P-2	H-TB2W

Reference pages: Inserts, Standard cutting conditions → **H081**