


Lever-lock toolholder with TungCap connection, for negative 55° rhombic inserts, with high pressure coolant capability

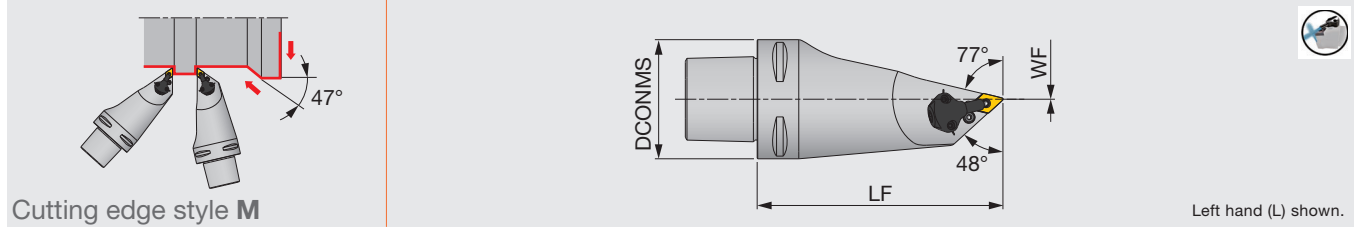

Designation	DCONMS	LF	WF	RE**	Insert
C6PDMNL00130-1104-CHP	63	130	0	0.8	DN**1104...

Applicable for 14 MPa coolant
**RE : Standard corner radius

For external turning only

SPARE PARTS

Designation	Shim	Clamping screw	Wrench 1	Spring pin	Lever
C6PDMNL00130-1104-CHP	ELSD32	LCS3	P-2.5	LSP3	LCL33L

SPARE PARTS

Designation	Coolant unit	Mounting screw	Wrench 2	O-ring
C6PDMNL00130-1104-CHP	CU-D-CHP	SRM3	T-8F	OR6.4X0.9N

INSERT SELECTION

Application	Finishing	Medium cutting
	Grade	T9215
Chipbreaker Shape	TSF	TM
Cutting conditions	B006	

Application	Finishing	Medium cutting
	Grade	T6120
Chipbreaker Shape	SS	SM
Cutting conditions	B008	

Application	Medium cutting
Grade	T515
Chipbreaker Shape	TM
Cutting conditions	B010

Reference pages: C-PDMNL-CHP: Inserts → **B065 -**
Parts for coolant hose → **C134**

