


88° face mill, with screw clamp system, for double sided square inserts

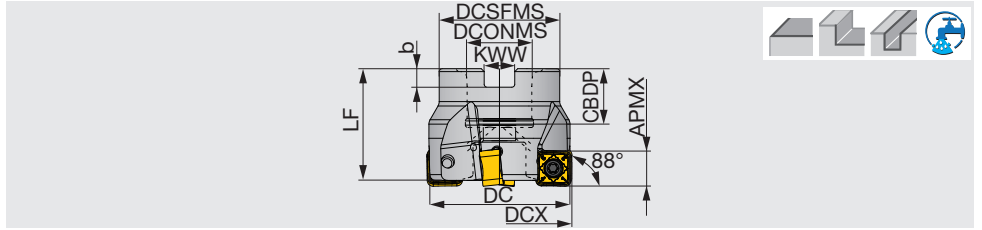

GAMP = +3°, GAMF = -11°

Designation	APMX	DC	DCX	CICT	DCSEMS	LF	DCONMS	CBDP	KWW	b	WT(kg)	Air hole	Insert
THSN12M050B22.0R04	9.5	50	50.6	4	41	40	22	20	10.4	6.3	0.32	With	SNMU1206...
THSN12M050B22.0R05	9.5	50	50.6	5	41	40	22	20	10.4	6.3	0.32	With	SNMU1206...
THSN12M063B22.0R04	9.5	63	63.6	4	47	40	22	20	10.4	6.3	0.54	With	SNMU1206...
THSN12M063B22.0R06	9.5	63	63.6	6	47	40	22	20	10.4	6.3	0.52	With	SNMU1206...
THSN12J080B25.4R05	9.5	80	80.6	5	58	50	25.4	26	8.5	6	1.13	With	SNMU1206...
THSN12J080B25.4R08	9.5	80	80.6	8	58	50	25.4	26	8.5	6	1.15	With	SNMU1206...
THSN12M080B27.0R05	9.5	80	80.6	5	58	50	27	22	12.4	7	1.17	With	SNMU1206...
THSN12M080B27.0R08	9.5	80	80.6	8	58	50	27	22	12.4	7	1.14	With	SNMU1206...
THSN12J100B31.7R06	9.5	100	100.6	6	60	50	31.75	32	12.7	8	1.43	With	SNMU1206...
THSN12J100B31.7R08	9.5	100	100.6	8	60	50	31.75	32	12.7	8	1.39	With	SNMU1206...
THSN12M100B32.0R06	9.5	100	100.6	6	60	50	32	28.5	14.4	8	1.4	With	SNMU1206...
THSN12M100B32.0R08	9.5	100	100.6	8	60	50	32	28.5	14.4	8	1.38	With	SNMU1206...

**SPARE PARTS**



Designation	Clamping screw	Torx bit	Grip	Shell locking bolt
THSN12M050...	CSPB-4	BLDIP15/S7	H-TB2W	CM10x30H
THSN12M063...	CSPB-4	BLDIP15/S7	H-TB2W	CM10x30H
THSN12J080...	CSPB-4	BLDIP15/S7	H-TB2W	CM12X30H
THSN12M080...	CSPB-4	BLDIP15/S7	H-TB2W	CM12X30H
THSN12J100...	CSPB-4	BLDIP15/S7	H-TB2W	TMBA-M16H
THSN12M100...	CSPB-4	BLDIP15/S7	H-TB2W	TMBA-M16H

\*Recommended clamping torque (N·m): CSPB-4=3.5

