


INSERT - FOR GROOVING AND PARTING OFF

TCS27

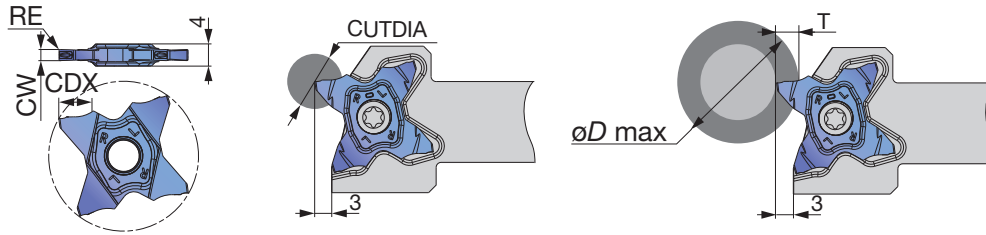

P	Steel	★	
M	Stainless	★	
K	Cast iron	★	
N	Non-ferrous		
S	Superalloys	★	
H	Hard materials		

★ : First choice
☆ : Second choice

Designation	CW±0.02	RE	Coated		CDX	CUTDIA	Relation of groove depth (T) and Max. diameter (øD max)													
			AH725				T≤1	T≤2	T≤3	T≤3.5	T≤4	T≤4.5	T≤5	T≤5.5	T≤5.7	T≤6	T≤6.2	T≤6.4		
TCS27-050-000	0.5	0	●		1	2	∞	-	-	-	-	-	-	-	-	-	-	-		
TCS27-050-004	0.5	0.04	●		2.5	5	∞	∞	-	-	-	-	-	-	-	-	-	-		
TCS27-075-010	0.75	0.1	●		2.5	5	∞	∞	-	-	-	-	-	-	-	-	-	-		
TCS27-080-000	0.8	0	●		1.6	3.2	∞	-	-	-	-	-	-	-	-	-	-	-		
TCS27-100-006	1	0.06	●		3.5	7	∞	∞	∞	600	-	-	-	-	-	-	-	-		
TCS27-100-010	1	0.1	●		3.5	7	∞	∞	∞	600	-	-	-	-	-	-	-	-		
TCS27-104-000	1.04	0	●		2	4	∞	∞	-	-	-	-	-	-	-	-	-	-		
TCS27-120-000	1.2	0	●		2	4	∞	∞	-	-	-	-	-	-	-	-	-	-		
TCS27-125-010	1.25	0.1	●		3.5	7	∞	∞	∞	600	-	-	-	-	-	-	-	-		
TCS27-125-020	1.25	0.2	●		3.5	7	∞	∞	∞	600	-	-	-	-	-	-	-	-		
TCS27-140-000	1.4	0	●		2	4	∞	∞	-	-	-	-	-	-	-	-	-	-		
TCS27-147-000	1.47	0	●		2.5	5	∞	∞	-	-	-	-	-	-	-	-	-	-		
TCS27-150-010	1.5	0.1	●		5.7	11.4	∞	∞	∞	600	280	180	130	50	35	-	-	-		
TCS27-150-020	1.5	0.2	●		5.7	11.4	∞	∞	∞	600	280	180	130	50	35	-	-	-		
TCS27-157-015	1.57	0.15	●		3	6	∞	∞	∞	-	-	-	-	-	-	-	-	-		
TCS27-170-010	1.7	0.1	●		3	6	∞	∞	∞	-	-	-	-	-	-	-	-	-		
TCS27-175-010	1.75	0.1	●		3	6	∞	∞	∞	-	-	-	-	-	-	-	-	-		
TCS27-175-020	1.75	0.2	●		3	6	∞	∞	∞	-	-	-	-	-	-	-	-	-		
TCS27-178-018	1.78	0.18	●		3	6	∞	∞	∞	-	-	-	-	-	-	-	-	-		
TCS27-185-020	1.85	0.2	●		3	6	∞	∞	∞	-	-	-	-	-	-	-	-	-		
TCS27-196-015	1.96	0.15	●		3	6	∞	∞	∞	-	-	-	-	-	-	-	-	-		
TCS27-200-010	2	0.1	●		6.4	12.8	∞	∞	∞	600	280	180	130	105	85	60	50	30		
TCS27-200-020	2	0.2	●		6.4	12.8	∞	∞	∞	600	280	180	130	105	85	60	50	30		
TCS27-222-015	2.22	0.15	●		3.5	7	∞	∞	∞	600	-	-	-	-	-	-	-	-		
TCS27-230-020	2.3	0.2	●		3.5	7	∞	∞	∞	600	-	-	-	-	-	-	-	-		
TCS27-239-015	2.39	0.15	●		5.7	11.4	∞	∞	∞	600	280	180	130	50	35	-	-	-		
TCS27-247-020	2.47	0.2	●		5.7	11.4	∞	∞	∞	600	280	180	130	50	35	-	-	-		
TCS27-250-010	2.5	0.1	●		5.7	11.4	∞	∞	∞	600	280	180	130	50	35	-	-	-		
TCS27-250-030	2.5	0.3	●		5.7	11.4	∞	∞	∞	600	280	180	130	50	35	-	-	-		
TCS27-270-010	2.7	0.1	●		6.2	12.4	∞	∞	∞	600	280	180	135	105	95	85	78	-		
TCS27-287-020	2.87	0.2	●		6.2	12.4	∞	∞	∞	600	280	180	135	105	95	85	78	-		
TCS27-300-000	3	0	●		6.4	12.8	∞	∞	∞	600	280	180	135	105	95	85	78	55		
TCS27-300-020	3	0.2	●		6.4	12.8	∞	∞	∞	600	280	180	135	105	95	85	78	55		
TCS27-300-030	3	0.3	●		6.4	12.8	∞	∞	∞	600	280	180	135	105	95	85	78	55		
TCS27-300-040	3	0.4	●		6.4	12.8	∞	∞	∞	600	280	180	135	105	95	85	78	55		
TCS27-315-015	3.15	0.15	●		6.4	12.8	∞	∞	∞	600	280	180	135	105	95	85	78	68		
TCS27-318-020	3.18	0.2	●		6.4	12.8	∞	∞	∞	600	280	180	135	105	95	85	78	68		


5 pieces per package

● : Line up

Reference pages: Toolholders → **F046 - F049**, Standard cutting conditions → **F053**

INSERT- FOR PARTING OFF

TCS27-R/L

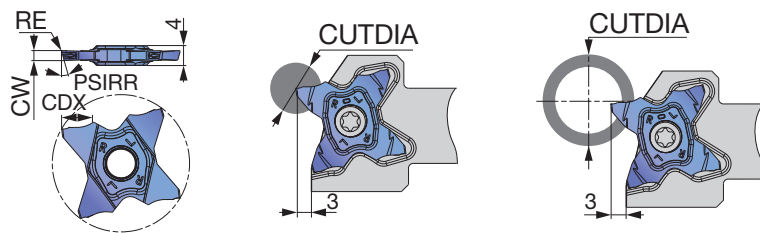

Right hand (R) shown.

P	Steel	★		
M	Stainless	★		
K	Cast iron	★		
N	Non-ferrous			
S	Superalloys	★		
H	Hard materials			

★ : First choice
☆ : Second choice


Designation	HAND	CW±0.02	RE	Coated		CDX	PSIRL	PSIRR	Max. parting off dia. CUTDIA	
				AH725					Solid bar	Tube
TCS27-100-15R	R	1	0.06	●		3.5	0°	15°	7	600
TCS27-100-15L	L	1	0.06	●		3.5	15°	0°	7	600
TCS27-150-6R	R	1.5	0.06	●		5.7	0°	6°	11.4	35
TCS27-150-6L	L	1.5	0.06	●		5.7	6°	0°	11.4	35
TCS27-150-15R	R	1.5	0.06	●		5.7	0°	15°	11.4	35
TCS27-150-15L	L	1.5	0.06	●		5.7	15°	0°	11.4	35
TCS27-200-6R	R	2	0.1	●		6.4	0°	6°	12.8	30
TCS27-200-6L	L	2	0.1	●		6.4	6°	0°	12.8	30
TCS27-200-15R	R	2	0.1	●		6.4	0°	15°	12.8	30
TCS27-200-15L	L	2	0.1	●		6.4	15°	0°	12.8	30

5 pieces per package

● : Line up

INSERT- FOR GROOVING AND PROFILING

TCS27 (Full R)

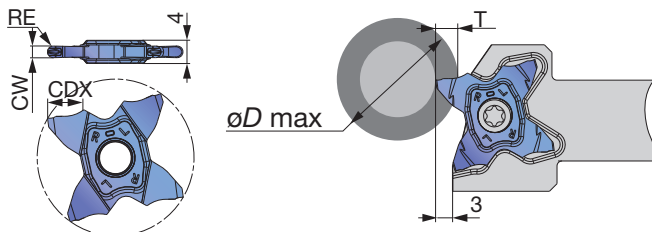

P	Steel	★		
M	Stainless	★		
K	Cast iron	★		
N	Non-ferrous			
S	Superalloys	★		
H	Hard materials			

★ : First choice
☆ : Second choice


Designation	CW±0.02	RE	Coated		CDX	Relation of groove depth (T) and Max. diameter (øD max)									
			AH725			T ≤ 1 T ≤ 2 T ≤ 3	T ≤ 3.5	T ≤ 4	T ≤ 4.5	T ≤ 5	T ≤ 5.5	T ≤ 5.7	T ≤ 6	T ≤ 6.2	T ≤ 6.4
TCS27-157-079	1.57	0.79	●		3	∞	-	-	-	-	-	-	-	-	-
TCS27-200-100	2	1	●		3	∞	-	-	-	-	-	-	-	-	-
TCS27-239-120	2.39	1.2	●		5.7	∞	600	280	180	130	50	35	-	-	-
TCS27-300-150	3	1.5	●		6.4	∞	600	280	180	135	105	95	85	78	55

5 pieces per package

● : Line up

INSERT- FOR GROOVING AND PARTING OFF

TCM27

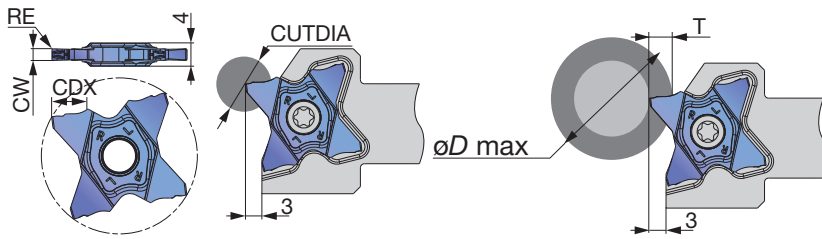

P	Steel	★		
M	Stainless	★		
K	Cast iron	★		
N	Non-ferrous			
S	Superalloys	★		
H	Hard materials			

★ : First choice
☆ : Second choice


Designation	CW±0.02	RE	Coated		CDX	CUTDIA	Relation of groove depth (T) and Max. diameter (øD max)									
			AH725				T≤1 T≤2 T≤3	T≤3.5	T≤4	T≤4.5	T≤5	T≤5.5	T≤5.7	T≤6	T≤6.2	T≤6.4
TCM27-150-010	1.5	0.1	●		5.7	11.4	∞	600	280	180	130	50	35	-	-	-
TCM27-150-020	1.5	0.2	●		5.7	11.4	∞	600	280	180	130	50	35	-	-	-
TCM27-157-015	1.57	0.15	●		3	6	∞	-	-	-	-	-	-	-	-	-
TCM27-170-010	1.7	0.1	●		3	6	∞	-	-	-	-	-	-	-	-	-
TCM27-175-010	1.75	0.1	●		3	6	∞	-	-	-	-	-	-	-	-	-
TCM27-175-020	1.75	0.2	●		3	6	∞	-	-	-	-	-	-	-	-	-
TCM27-178-018	1.78	0.18	●		3	6	∞	-	-	-	-	-	-	-	-	-
TCM27-185-020	1.85	0.2	●		3	6	∞	-	-	-	-	-	-	-	-	-
TCM27-196-015	1.96	0.15	●		3	6	∞	-	-	-	-	-	-	-	-	-
TCM27-200-010	2	0.1	●		6.4	12.8	∞	600	280	180	130	105	85	60	50	30
TCM27-200-020	2	0.2	●		6.4	12.8	∞	600	280	180	130	105	85	60	50	30
TCM27-222-015	2.22	0.15	●		3.5	7	∞	600	-	-	-	-	-	-	-	-
TCM27-230-020	2.3	0.2	●		3.5	7	∞	600	-	-	-	-	-	-	-	-
TCM27-239-015	2.39	0.15	●		5.7	11.4	∞	600	280	180	130	50	35	-	-	-
TCM27-247-020	2.47	0.2	●		5.7	11.4	∞	600	280	180	130	50	35	-	-	-
TCM27-250-010	2.5	0.1	●		5.7	11.4	∞	600	280	180	130	50	35	-	-	-
TCM27-250-030	2.5	0.3	●		5.7	11.4	∞	600	280	180	130	50	35	-	-	-
TCM27-270-010	2.7	0.1	●		6.2	12.4	∞	600	280	180	135	105	95	85	78	-
TCM27-287-020	2.87	0.2	●		6.2	12.4	∞	600	280	180	135	105	95	85	78	-
TCM27-300-000	3	0	●		6.4	12.8	∞	600	280	180	135	105	95	85	78	55
TCM27-300-020	3	0.2	●		6.4	12.8	∞	600	280	180	135	105	95	85	78	55
TCM27-300-030	3	0.3	●		6.4	12.8	∞	600	280	180	135	105	95	85	78	55
TCM27-300-040	3	0.4	●		6.4	12.8	∞	600	280	180	135	105	95	85	78	55
TCM27-315-015	3.15	0.15	●		6.4	12.8	∞	600	280	180	135	105	95	85	78	68
TCM27-318-020	3.18	0.2	●		6.4	12.8	∞	600	280	180	135	105	95	85	78	68

5 pieces per package

● : Line up

INSERT - FOR GROOVING AND PROFILING

TCM27 (Full R)

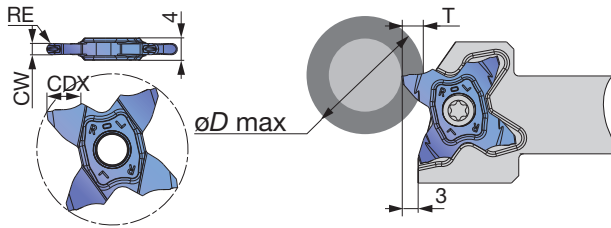

P	Steel	★		
M	Stainless	★		
K	Cast iron	★		
N	Non-ferrous			
S	Superalloys	★		
H	Hard materials			

★ : First choice
☆ : Second choice



Designation	CW±0.02	RE	Coated		CDX	CUTDIA	Relation of groove depth (T) and Max. diameter (øD max)									
			AH725				T≤1 T≤2 T≤3	T≤3.5	T≤4	T≤4.5	T≤5	T≤5.5	T≤5.7	T≤6	T≤6.2	T≤6.4
TCM27-157-079	1.57	0.79	●		3	6	∞	-	-	-	-	-	-	-	-	-
TCM27-200-100	2	1	●		3	6	∞	600	-	-	-	-	-	-	-	-
TCM27-239-120	2.39	1.2	●		5.7	11.4	∞	600	280	180	130	50	35	-	-	-
TCM27-300-150	3	0.2	●		6.4	12.8	∞	600	280	180	135	105	95	85	78	55

5 pieces per package

● : Line up

CHIPBREAKER



TCS27



CW = 0.5 mm – 3.18 mm

For general machining Lower cutting force and superior sharpness

TCM27



CW = 1.5 mm – 3.18 mm

For high feed machining Well-designed edge with high strength

STANDARD CUTTING CONDITIONS

ISO	Workpiece material	Grades	Cutting speed Vc (m/min)	Feed f (mm/rev)					Depth of cut for profiling Turning (full radius)
				Grooving, Parting		Parting (with hand)		Turning (full radius)	
				TCS	TCM	TCS	TCS	TCM	
P	Carbon steel S45C, etc. C45, etc.	AH725	100 - 200	0.05 - 0.15	0.05 - 0.25	0.04 - 0.12	0.05 - 0.10	0.05 - 0.15	0.5
	Alloy steel SCM435, etc. 34CrMo4, etc.	AH725	50 - 180	0.05 - 0.15	0.05 - 0.25	0.04 - 0.12	0.05 - 0.10	0.05 - 0.15	0.5
M	Stainless steel SUS304, etc. X5CrNi18-9, etc.	AH725	100 - 150	0.05 - 0.15	0.05 - 0.20	0.04 - 0.12	0.05 - 0.10	0.05 - 0.15	0.5
K	Gray cast iron FC250, etc. 250, etc.	AH725	50 - 180	0.05 - 0.15	0.05 - 0.25	0.04 - 0.12	0.05 - 0.10	0.05 - 0.15	0.5
	Ductile cast irons FCD400, etc. 400-15, etc.	AH725	50 - 120	0.05 - 0.15	0.05 - 0.20	0.04 - 0.12	0.05 - 0.10	0.05 - 0.15	0.5
S	Titanium alloys Ti-6Al-4V, etc.	AH725	30 - 60	0.05 - 0.15	0.05 - 0.15	0.04 - 0.12	0.05 - 0.10	0.05 - 0.10	0.5
	Superalloys Inconel718, etc.	AH725	20 - 50	0.05 - 0.15	0.05 - 0.15	0.04 - 0.12	0.05 - 0.10	0.05 - 0.10	0.5

Reference pages: Toolholders → F046 - F053